

111 系列充油式压力表

111 Liquid Filled Pressure Gauges

Description

111 系列是专为极端环境或高纯度设备而设计，经久耐用，具有 SS304 表壳和 SS316 内接，可用于大多数腐蚀性环境，振动和脉动环境，食品，供水，医疗等。

111 series are designed for critical environment or high pure devices with long durability, it has SS304 housing and SS316 internals, can be used in most corrosive atmospheres, vibration and pulsation environments, food industry, water supplier, medical, etc..




111A

Material Feature

指针 Pointer:	铝 Aluminium	表壳安装 Case mount:	滚边壳 Crimp Bezel Case
机芯 Movement:	不锈钢 SS304	外壳 Case:	不锈钢 304, 抛光 SS304, Polished
接头 Connection:	不锈钢 SS316	表圈 Ring:	不锈钢 304, 抛光 SS304, Polished
精度 Accuracy:	1.6%/1.0%*	螺纹尺寸 Thread Size:	1/8", 1/4", 3/8", 1/2"
表面 Window:	聚碳酸酯 Polycarbonate	弹簧管 Bourdon Tube:	不锈钢 SS316
填充液 Filling Liquid:	甘油 Glycerine	压力范围 Pres. Range:	VAC~9PSI~15000PSI
*1.0%的精度可定制 *1.0% accuracy is available when required			

Dimensions

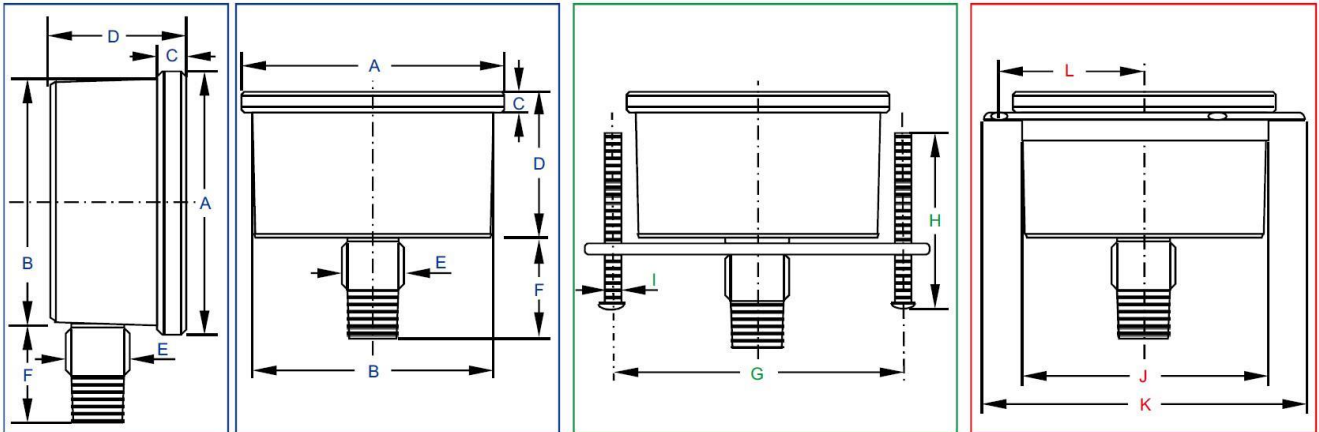

Code	Dia (mm)	Sizes (mm)											
		A	B	C	D	E	F	G	H	I	J	K	L
A111	40	46.5	41.0	5.0	25.5	14.0	23.0	48.0	37.0	4.0	43.0	62.0	26.5
B111	50	52.5	52.0	6.0	29.0	14.0	24.0	60.0	37.0	5.0	54.0	73.0	32.0
C111	63	68.0	61.0	6.0	29.0	14.0	24.0	71.0	37.0	5.0	63.0	84.0	37.0
D111	75	81.0	74.5	7.0	30.0	14.0	24.0	-	-	-	-	-	-
E111	80	87.0	80.0	7.0	30.0	14.0	24.0	-	-	-	-	-	-
G111	100	108.5	98.5	9.0	37.5	22.0	36.0	-	-	-	99.5	130.0	58.5

Main Mount type



Bottom Mount



Back Mount



Back Mount With U-Clamp



Back Mount With Front Flange