

117 系列充油式压力表

117 Liquid Filled Pressure Gauges

Description

117 系列是 SS304 外壳和 SS316 内接, 可充甘油, 可用于大多数腐蚀性环境, 振动和脉动环境, 食品, 供水, 医疗等。

117 series is it has SS304 housing and SS316, SS316L internal slt. It can be filled with glycerine oil, which can be used in most corrosive atmospheres, vibration and pulsation environments, food industry, water supplier, medical.




117A

Material Feature

指针 Pointer:	铝 Aluminium	表壳安装 Case mount:	滚边壳 Crimp Bezel Case
机芯 Movement:	不锈钢 SS304	外壳 Case:	不锈钢 304, 抛光 SS304, Polished
接头 Connection:	不锈钢 SS316	表圈 Ring:	不锈钢 304, 抛光 SS304, Polished
精度 Accuracy:	1.6%/1.0%*	螺纹尺寸 Thread Size:	1/8", 1/4", 3/8", 1/2"
表面 Window:	聚碳酸酯 Polycarbonate	弹簧管 Bourdon Tube:	不锈钢 SS316L
填充液 Filling Liquid:	甘油 Glycerine	防护等级 Protection:	IP67
压力范围 Pres. Range:	VAC~9PSI~15000PSI		

*1.0%的精度可定制 *1.0% accuracy is available when required

Dimensions

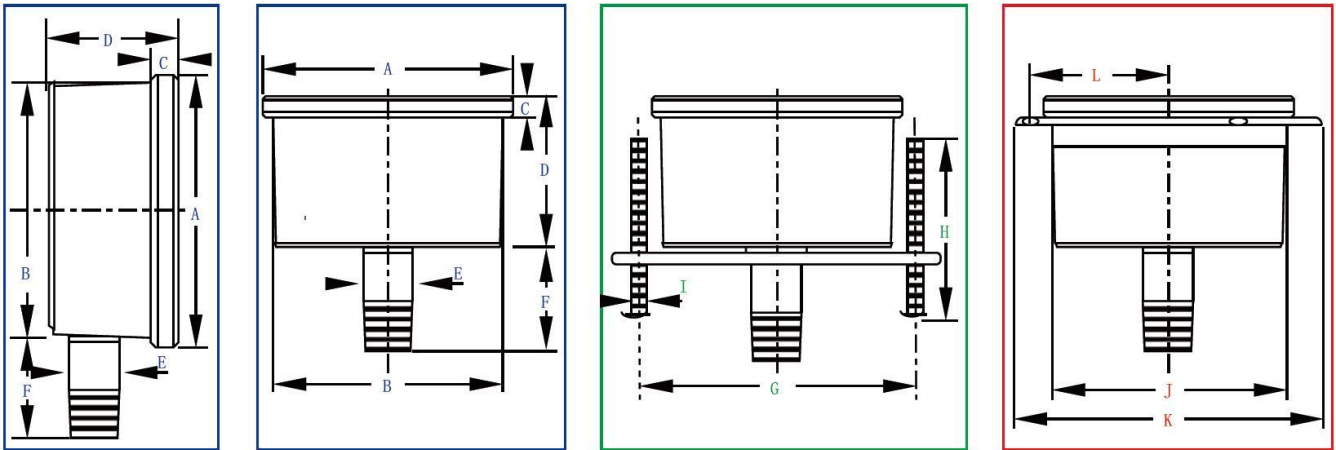

Code	Dia (mm)	Sizes (mm)											
		A	B	C	D	E	F	G	H	I	J	K	L
A117	40	46.5	41.0	5.0	25.5	14.0	23.0	48.0	37.0	4.0	43.0	62.0	26.5
B117	50	52.5	52.0	6.0	29.0	14.0	24.0	60.0	37.0	5.0	54.0	73.0	32.0
C117	63	68.0	61.0	6.0	29.0	14.0	24.0	71.0	37.0	5.0	63.0	84.0	37.0
D117	75	81.0	74.5	7.0	30.0	14.0	24.0	-	-	-	-	-	-
E117	80	87.0	80.0	7.0	30.0	14.0	24.0	-	-	-	-	-	-
G117	100	108.5	98.5	9.0	37.5	22.0	36.0	-	-	-	99.5	130.0	58.5

Main Mount type



Bottom Mount



Back Mount



Back Mount With U-Clamp



Back Mount With Front Flange